



# ECLISSE SYNTESIS® LINE DOUBLE

## STUD WALL

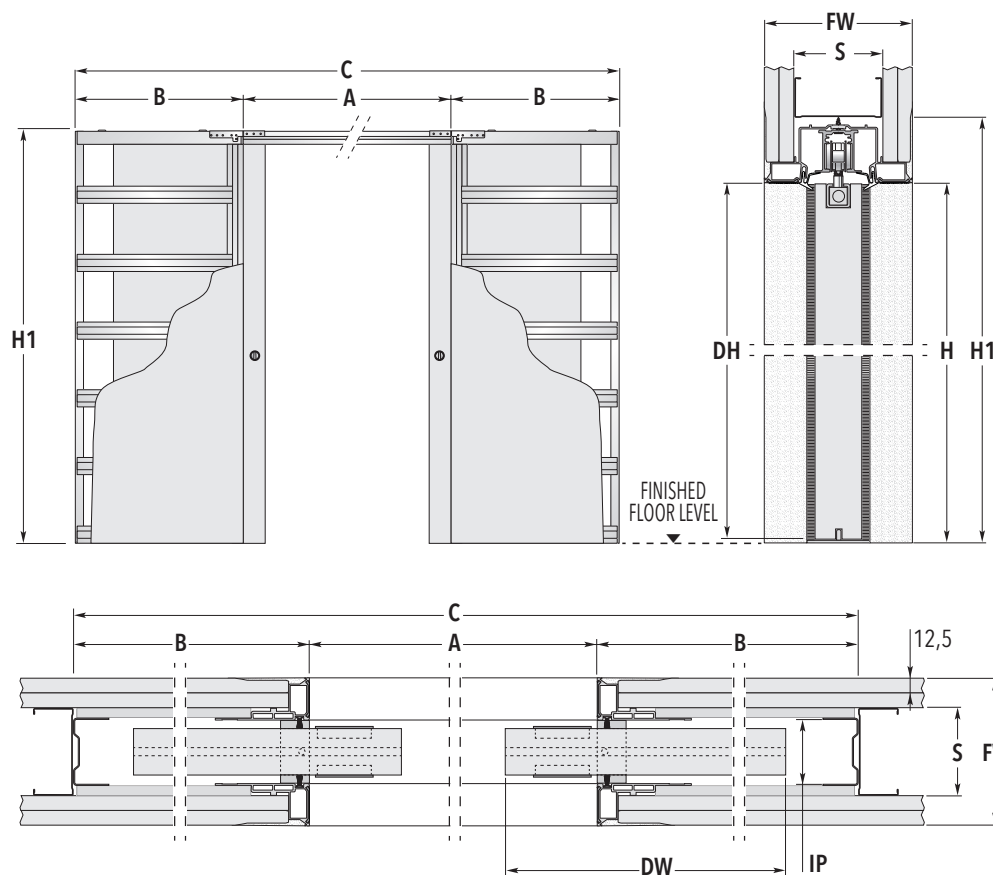

### WARNING

Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

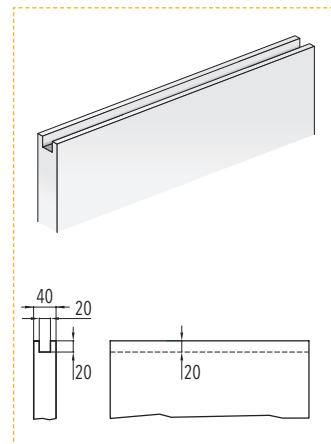

### SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

| PASSAGE SIZE<br>A x H | OVERALL DIMENSIONS<br>B C x H1 | DOOR PANEL*<br>DW DH  |
|-----------------------|--------------------------------|-----------------------|
| 1200 x 2000/2100      | 750 2686 x 2060/2160           | 615 ÷ 635 1992/2092   |
| 1400 x 2000/2100      | 850 3086 x 2060/2160           | 715 ÷ 735 1992/2092   |
| 1600 x 2000/2100      | 950 3486 x 2060/2160           | 815 ÷ 835 1992/2092   |
| 1800 x 2000/2100      | 1050 3886 x 2060/2160          | 915 ÷ 935 1992/2092   |
| 2000 x 2000/2100      | 1150 4286 x 2060/2160          | 1015 ÷ 1035 1992/2092 |

| FINISHED WALL = FW | STUDWORK = S                       | INTERNAL PASSAGE = IP |
|--------------------|------------------------------------|-----------------------|
| 100 →              | 75 - with one plasterboard layer   | 54                    |
| 125 →              | 75 - with two plasterboard layers  | 54                    |
| 150 →              | 100 - with two plasterboard layers | 54                    |

Dimensions are given in mm

### NON-STANDARD SIZES

- ▶ Passage width  
FW 100: 600+600÷1000+1000 mm  
FW 125: 600+600÷1300+1300 mm  
FW 150: 600+600÷2000+2000 mm
- ▶ Passage height  
FW 100: 1000÷2100 mm  
FW 125: 1000÷2700 mm  
FW 150: 1000÷3000 mm
- ▶ Half sizes require bespoke door panels (e.g. A=1300 mm).

### NOTES

- ▶ Passage width A is reduced by 14 mm.
- ▶ For A>2000 mm and H>2150 mm only FW 125 and FW 150 are available.
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- \* Listed measures refers to wooden door panels only.

### ACCESSORIES

- ▶ Double door co-ordination for SYNTESIS® FLUSH
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD